


Northwire SJT™ EnduroFLEX® I

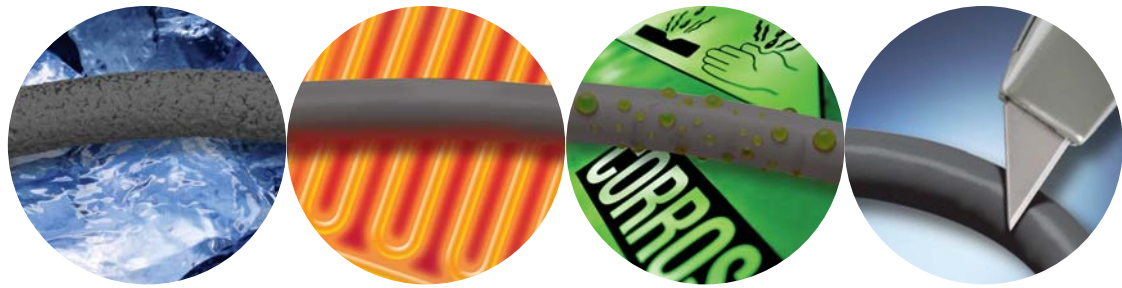

High-Spec Power Cordage

Power cord on demand.

Through our NorthwireDirect program, power cord orders are ready to ship from stock to 10 days or less. Choose from the highest-quality Northwire power cords in a wide range of gauge and conductor configurations in either Northwire SJT or EnduroFLEX I grades for the most demanding applications. Custom and variants are also available for fast delivery.



Northwire SJT

- Rugged-duty, PVC-insulated flexible power cord
- Meets or exceeds UL and CSA ratings for 60°C and 105°C; SJT, SJTW, SJTO and SJTOW are rated to 300V
- Oil-, detergent-, solvent- and moisture-resistant construction
- Outdoor-rated

EnduroFLEX I

- Harshest-duty SJEOW power cord rated to 300V
- Special thermoplastic alloy jacket material
- Meets or exceeds UL and CSA rating for 105°C SJEOW
- Maintains excellent flexibility to -50°C
- Oil-, detergent-, solvent- and moisture-resistant construction
- Unique jacket material provides excellent abrasion resistance

Quality

Northwire power cord products are recognized for their superior appearance, concentricity and stripability. Laser-controlled manufacturing processes assure optimum and consistent diameters and dimension control.

Availability

All products listed are available from stock to 10 days or less.

Customs and Variants

Northwire specializes in **Custom Technical Cable**. Custom designs, materials, lengths, legend colors and constructions are all readily available.

Call 1-800-468-1516 and ask for a free analysis of your cable needs.

Custom Colors


Standard jacket color is black. Other colors and configurations are readily available by request.

Ordering

Call NorthwireDirect at **1-800-468-1516** for immediate shipment.


We accept Visa and MasterCard for easy payment.



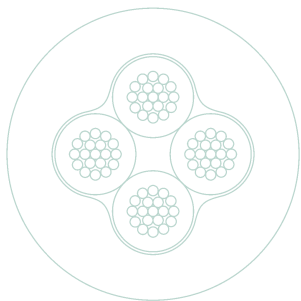

Northwire SJT™
standard black jacket
flexible power cordage
 meets or exceeds UL
 and CSA approvals for
 60°C and 105°C SJT,
 SJTW, SJTO and SJTOW.

Flexible Power Cordage: Northwire SJT Jacket				
Northwire Part Number	AWG/ Conductors	Stranding	Conductor OD	Cable OD
FSJT102-01R	10/2	105x30 Bare Cu	.215"	.565"
FSJT103-01R	10/3	105x30 Bare Cu	.215"	.610"
FSJT104-01R	10/4	105x30 Bare Cu	.215"	.675"
FSJT122-01R	12/2	65x30 Bare Cu	.161"	.415"
FSJT123-01R	12/3	65x30 Bare Cu	.161"	.445"
FSJT124-01R	12/4	65x30 Bare Cu	.161"	.485"
FSJT142-01K	14/2	41x30 Bare Cu	.135"	.354"
FSJT143-01K	14/3	41x30 Bare Cu	.135"	.378"
FSJT144-01K	14/4	41x30 Bare Cu	.135"	.415"
FSJT145-01K	14/5	41x30 Bare Cu	.135"	.450"
FSJT162-81K	16/2	26x30 Bare Cu	.120"	.315"
FSJT163-81K	16/3	26x30 Bare Cu	.120"	.345"
FSJT164-01K	16/4	26x30 Bare Cu	.120"	.380"
FSJT165-01K	16/5	26x30 Bare Cu	.120"	.425"
FSJT182-81K	18/2	16x30 Bare Cu	.110"	.295"
FSJT183-81K	18/3	16x30 Bare Cu	.110"	.325"
FSJT184-01K	18/4	16x30 Bare Cu	.110"	.340"
FSJT185-01K	18/5	16x30 Bare Cu	.110"	.380"
FSJT186-01K	18/6	16x30 Bare Cu	.110"	.415"

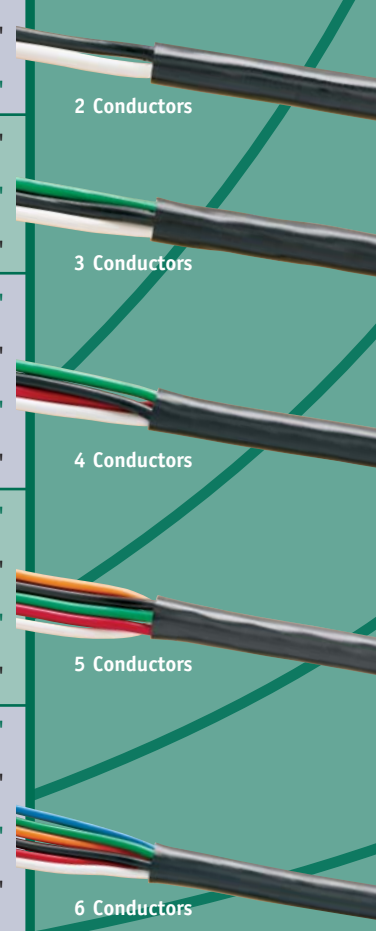

Northwire EnduroFLEX® I
standard black jacket
flexible power cordage
 meets or exceeds UL
 and CSA rating for
 105°C SJEOW.

Flexible Power Cordage: EnduroFLEX I Jacket				
Northwire Part Number	AWG/ Conductors	Stranding	Conductor OD	Cable OD
FSJE143-01K	14/3	105x34 Bare Cu	.135"	.378"
FSJE163-81K	16/3	65x34 Bare Cu	.120"	.345"
FSJE183-81K	18/3	41x34 Bare Cu	.110"	.325"



Made in the USA



ISO 9001 Certified

